

Crumbler /
Cracker.
DFZL

Excellent crumbling and cracking solution. **Economic, flexible and robust.**



Application

The Bühler crumbler /cracker DFZL is applied in feed manufacturing for crumbling feed pellets and size reduction applications in multistage grinding systems. It is also suited for cracking of oilseeds and for coarse grinding applications in various industries, such as flour milling or biomass.

Efficient and easy operation

The optimum design of the units' size reduction section and main drive allows the Bühler crumbler /cracker to achieve high throughput rates. The feeding system can be easily adjusted to the required throughput rates and ensures equal distribution of material over the full roll length. Roll gap adjustment is done easily, and the product granulation can be checked during operation via integrated sampling device.

High flexibility to meet customer needs

The crumbler/cracker DFZL can be tailored to meet customer-specific process requirements. A modular design of up to three crushing stages and different roll pair options offer outstanding flexibility. The unit can be equipped with manual (standard) or automatic (optional) roll gap adjustment. The compact design results in a low machine footprint.

Long service life through robust design


The machine frame of fabricated steel makes the crumbler / cracker extremely durable. The machines' rolls can be refluted several times and are protected from damage by cup springs, resulting in a long service life.

Benefits


- Efficient and easy operation
- High flexibility
- Long service life

Modular design. Customizable to your needs.


Modular concept



1x Feeder
1x Crushing stage





1x Feeder
2x Crushing stages




1x Feeder
3x Crushing stages

Mode of operation


The product is fed to the crushing stage via a segment feed gate and fluted feeder roll. Corrugated rolls with fluting profile tailored to the incoming raw material and end product requirements ensure optimal crushing / cracking results. The required granulation is achieved by adjustment of the roll gap. Visual monitoring of the production process can be done via the integrated sampling device.

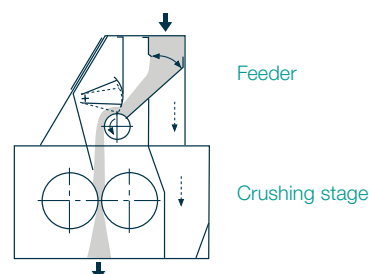

DFZL-1000/1500

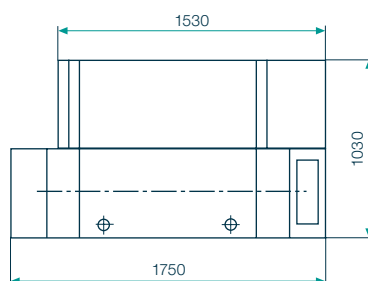

DFZL-1000

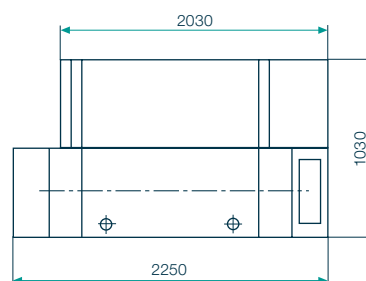

DFZL-1500

Dimensions in mm

Dimensions, technical data

		DFZL-1000	DFZL-1500
Throughput rate (range)	* t/h	8–25	15–40
Roll Dimensions	mm		
Diameter		250	250
Length		1000	1500
Motor specifications			
Motor power	kW	7.5 / 11 / 15 / 18.5 / 22	15 / 18.5 / 22 / 30 / 37
Motor speed in	min ⁻¹	1000 / 1200 (50 / 60 Hz)	1000 / 1200 (50 / 60 Hz)
Feeder motor	kW	0.37 kW	0.37 kW

* Depending on DFZL model, number of crushing stages, raw material and end product specifications.

Bühler AG

CH-9240 Uzwil
Switzerland

T +41 71 955 11 11
F +41 71 955 66 11

buhlergroup.com

Flyer Crumbler Cracker DFZL en 0221 Z&B 210399