



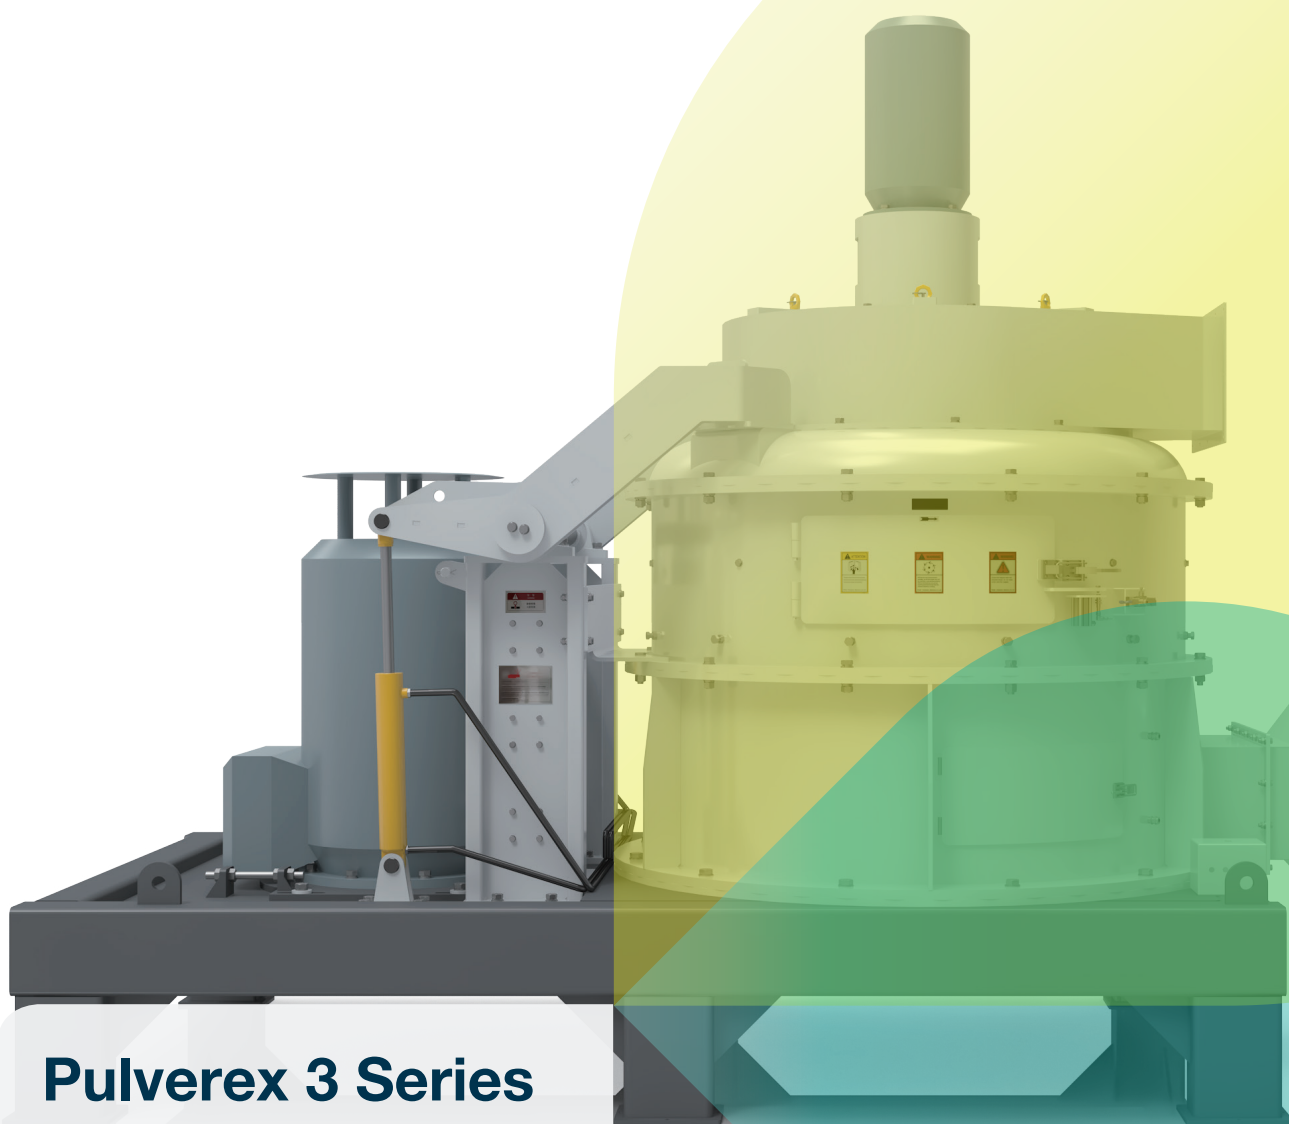

Pulverex 3 Series Pulverizer

Pulverex 3 Series

High grinding efficiency, even particle size distribution

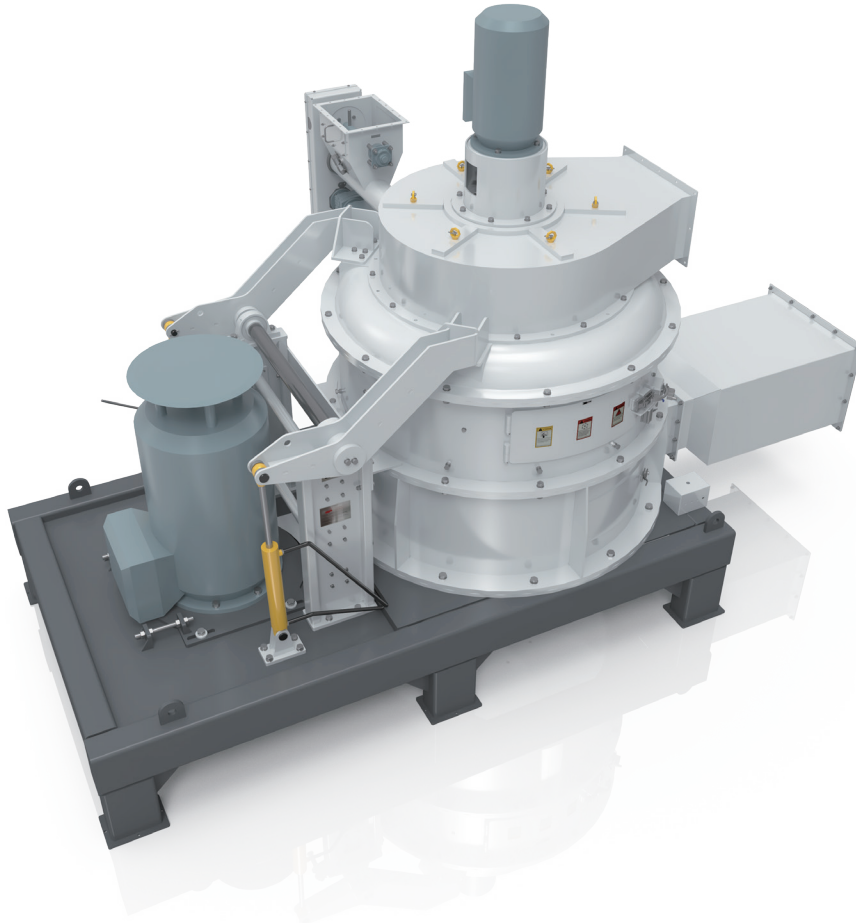

Applications

The Pulverex 3 Series pulverizer aims to further break down material for fish feed, shrimp feed, petfood or any other young animal feed production.

Customer benefits

- Particle size adjustable during operation
- High throughputs and convincing economic efficiency
- High performance wearing parts with long lifetime
- Fast and easy maintenance, reduced downtime

Product features

- Particle size continuously adjustable during operation, ranging from 60 mesh to 200 mesh;
- Feeder integrates lump breaker to keep continuous feeding;
- New classifying impeller design promotes discharge, reduces over pulverizing and improves productivity;
- New deflector hood design follows hydrodynamics to reduce air resistance and energy consumption;
- New top cover design improves the pass rate of finished products and increases capacity;
- Two side open maintenance doors enable easy access for replacement of wear parts;
- A hydraulic cover-opening device is designed to ease labor.

Pulverex 3 Series

Technical data and dimensions




Technical data

Type	Throughput* (t/h)	Power (kw)
AHFL 82	2-4	75-90
AHFL 110	3-6	110-132
AHFL 130	4-8	132-160
AHFL 160	7-10	160-200
AHFL 200	8-15	250-315

* Depending on raw material and required granulation

Dimension

Type	A	B	C	D	E	F	G	H	I	J
AHFL 82	1037	2437	987	851	1788	2652	1120	920	625	727
AHFL 110	923	2157	948	857	2047	2767	1215	905	800	962
AHFL 130	1107	2831	1205	990	2365	3286	1530	1180	954	1023
AHFL 160	1700	3670	1330	850	2200	3300	2020	1620	1175	1065
AHFL 200	-	3950	-	-	2414	3609	2260	-	1467	980

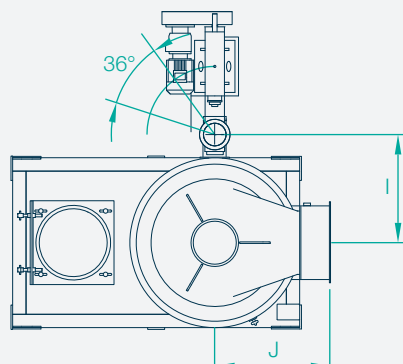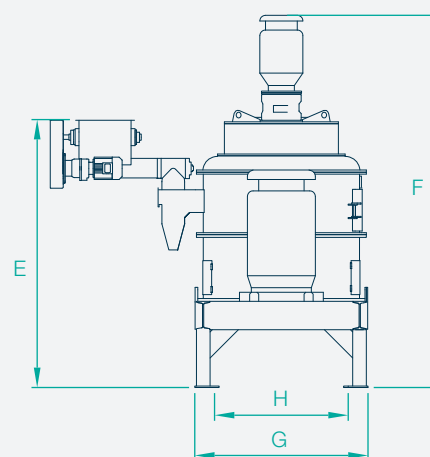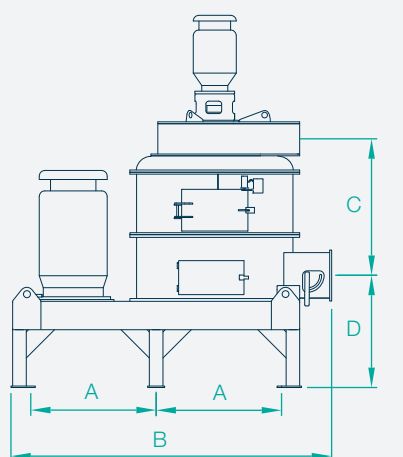

Bühler (Changzhou) Machinery Co., Ltd.

No.88, Yunmei Road, Tianmu Lake Industrial Park,
213332, Liyang, Jiangsu, China

Tel : +86 519 8796 6666

Fax: +86 519 8796 6000

Email: buhler.bcha@buhlergroup.com

<http://www.buhlergroup.com/feed>